

Introduction to **OW-200 A1/OW-218 A1**

CERIO
Amplify your Wireless Network



eXtreme Power Wave2 4x 11N/ac
5Ghz 2x2 Outdoor Bridge (300mW)

Contents

Product Overview	3
Advanced Features	4
Hardware Overview	5
Long Distance Solution	9
Proven Test Results	10
Highlight Features	11
Software Overview	14
What we do	32
Contact Information	33




- 5Ghz band supports 802.11 an/ac wireless protocol with a maximum data transfer rate of 867Mbps
- 300mW at 5Ghz Output eXtreme High Power design
- Supports IEEE 802.3at Power over Ethernet
- Built-in 18dBi 5GHz Directional Panel Antenna (**OW-218 A1**)
- Supports 2 N-Type Connectors for 5GHz external antennas (**OW-200 A1**)
- Supports CenOS 5.0 Software Core
- Weather-proof Housing (**IP68** Approved)




- Latest 11ac Wave2 technology provides wireless 4 channel (4x speed) simultaneous operation 5GHz wireless coverage for maximum flexibility.
- Operation modes include: AP with WDS Mode and Captive Portal, Control Access Point Mode, Client Bridge Mode, and WISP/ CPE Mode
- Built in 802.1x RADIUS authentication server and supports up to 50 User Accounts
- Incorporates 802.11r/k Fast Roaming Protocol
- CenOS 5.0 Control Access Point Mode (CAP) supports centralized management of up to 64 AP devices


Hardware Overview

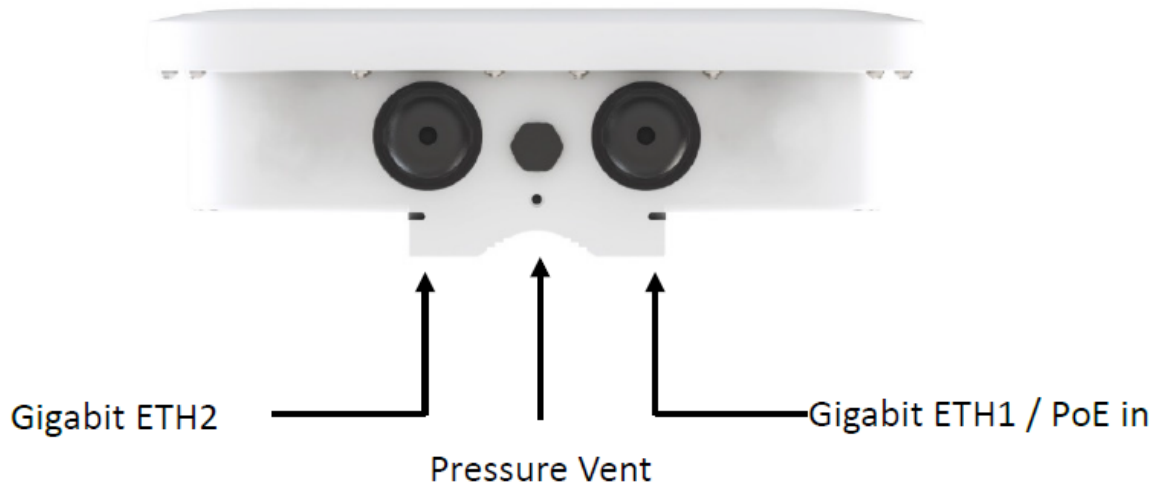

OW-218 A1

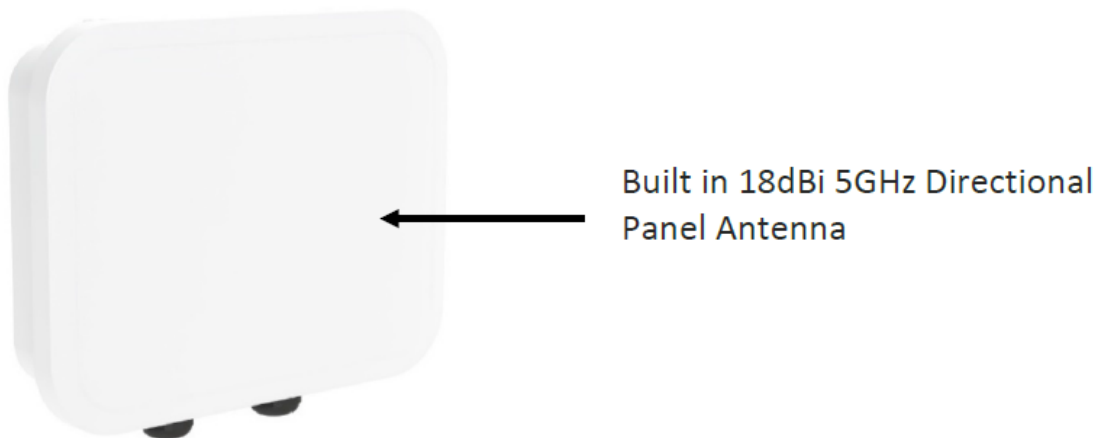


OW-200 A1

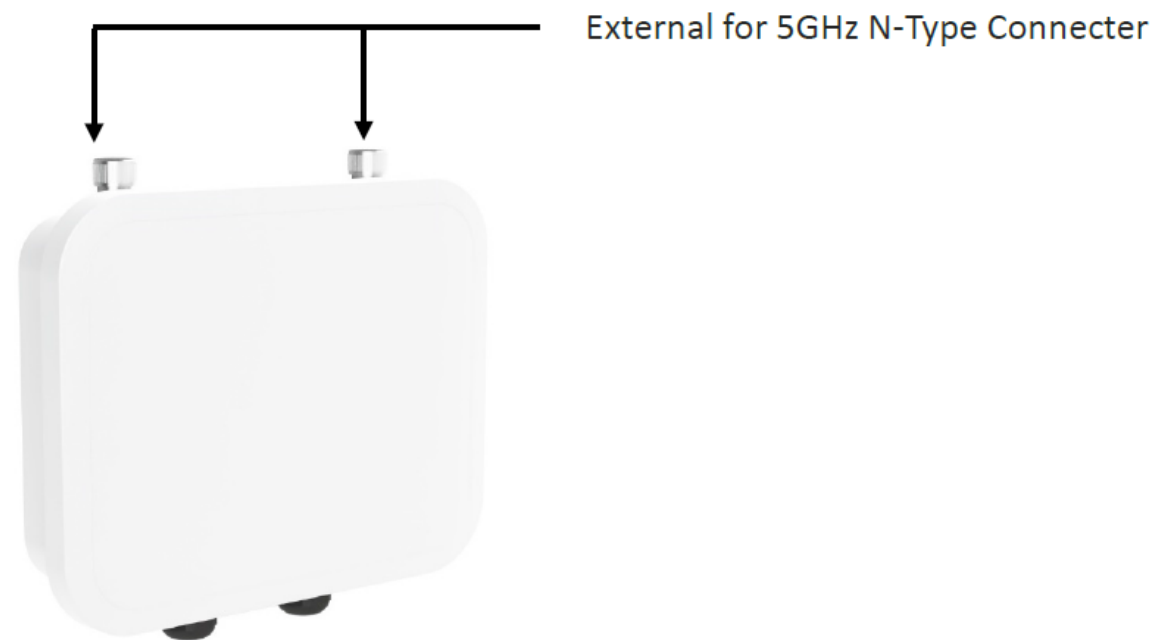

The integrated pressure vent allows the IP68 enclosure to breathe safely.


This auto-adjusting technology **equalizes pressure** inside the device and **reduces condensation** from building up inside.

The overall result of the Pressure Vent is that product performance and durability are increased. This effectively gives users peace of mind when deploying out OW-200 A1 / OW-218 A1.

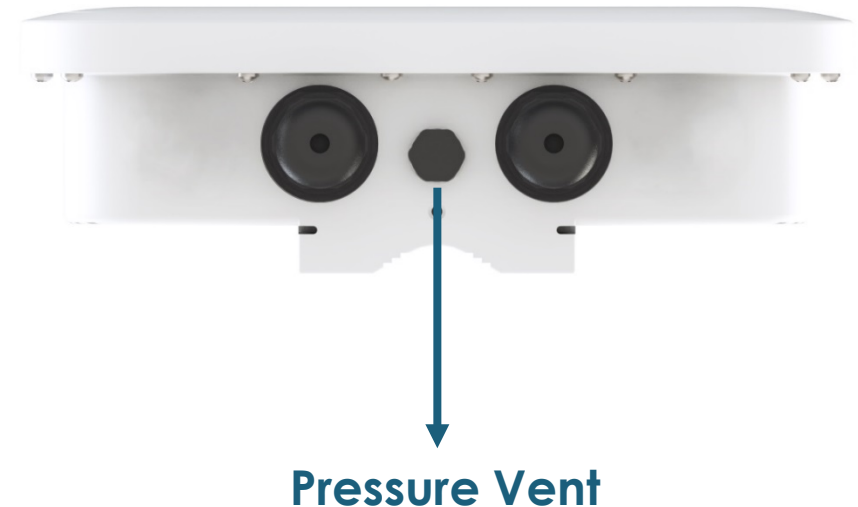

Versatile Mounting

Wall Mount Supported

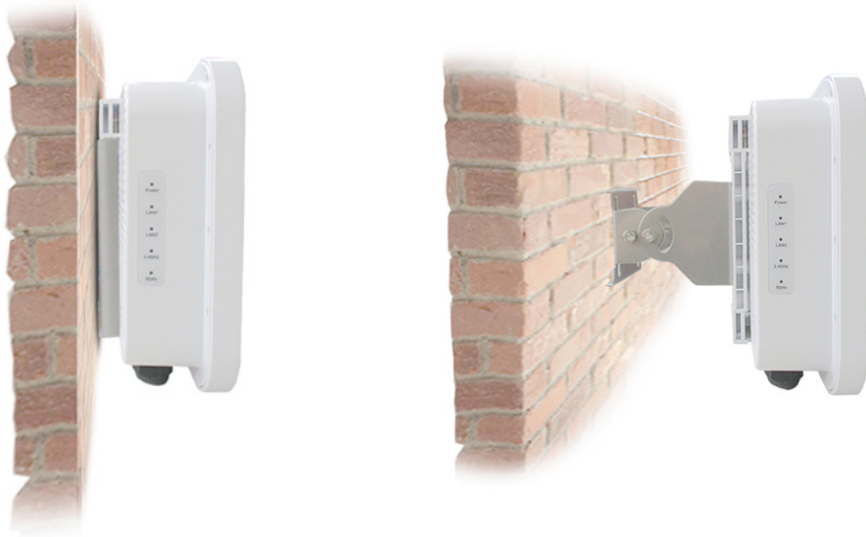

Adjustable

Pole Mount Supported




Adjustable

OW-200 A1's Adjustable pole/wall mounting kit is optional (OW-PKUR)

Hardware Reset Function Kit

- Bundles RJ45 Function Kit, which is able to reset the device to default remotely. It can save extra re-installation cost and time.

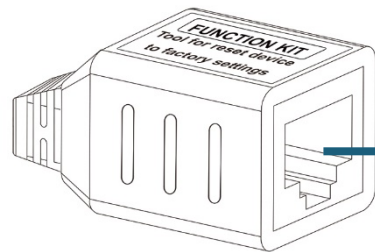


RJ45 Function Kit



ETH2 Port

RJ45 LAN Cable

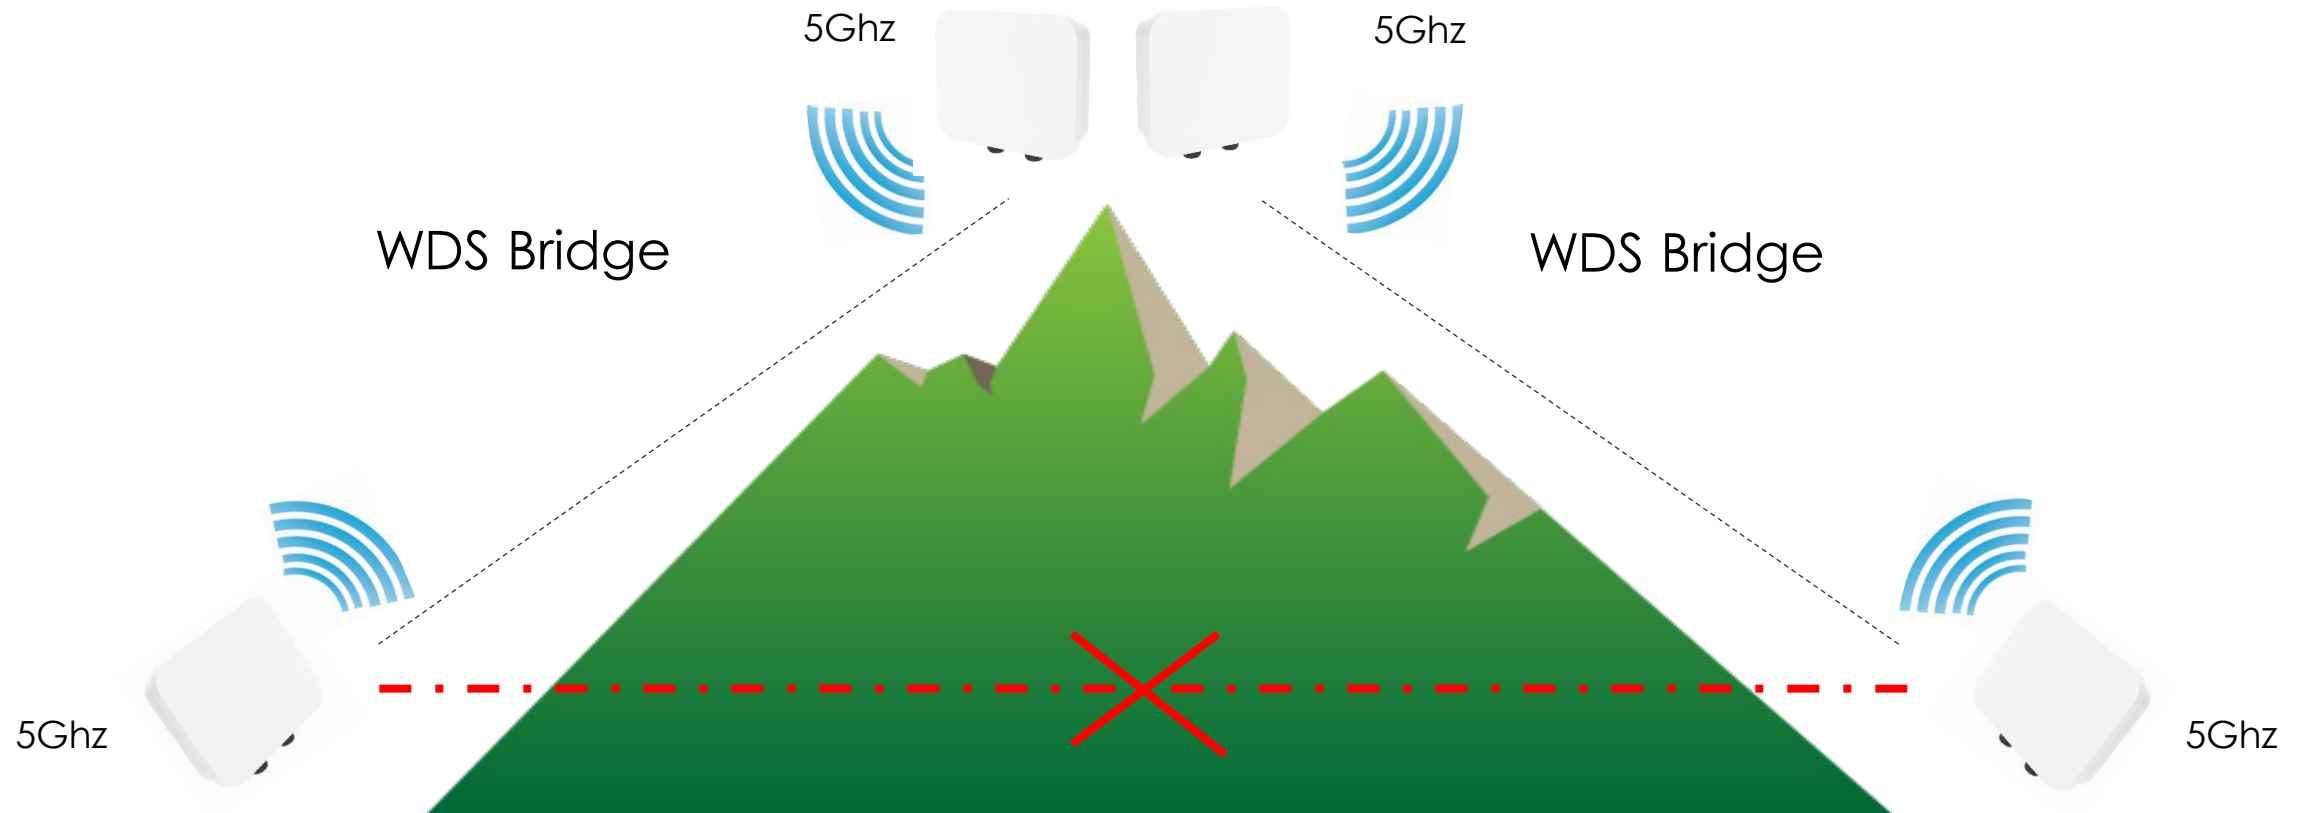

OW-200/218 A1's latest 11ac wave2 design is perfect for long distance PTP connections over the 5GHz frequency band. It's ideal for environments where line-of-sight obstacles obstruct device connections. The OW-200/218 A1 series can be deployed as an AP Bridge through WDS Mode to expand connections across difficult terrain.

OW-218 A1's high performance design maintained a high bandwidth of **449Mbps** during a **3.7KM outdoor point-to-point test** (5GHz) using a built-in 18 dBi antenna.



Test Setup		Throughput	Transaction Rate	Response Time	Raw Data Totals	Endpoint Configuration			
Group	Pair Group Name	Run Status	Timing Records Completed	95% Confidence Interval	Average (Mbps)	Minimum (Mbps)	Maximum (Mbps)	Measured Time (sec)	Relative Precision
All Pairs			396		449.298	74.906	125.984		
	Pair 1 No Group	Finished	98	-2.128 : +2.128	112.289	75.829	125.589	69.820	1.896
	Pair 2 No Group	Finished	99	-2.208 : +2.208	112.962	76.336	124.805	70.112	1.950
	Pair 3 No Group	Finished	100	-2.168 : +2.168	113.559	74.906	125.984	70.448	1.909
	Pair 4 No Group	Finished	99	-2.165 : +2.165	112.487	78.508	124.611	70.408	1.925



Powerful Performance — CERIO

1Mbps 9Mbps 9Mbps 3Mbps 4Mbps 4Mbps 11Mbps 9Mbps 1Mbps 11Mbps 10Mbps 12Mbps 2Mbps 2Mbps 10Mbps 10Mbps 10Mbps 9Mbps 9Mbps 3Mbps 1Mbps 11Mbps 10Mbps 10Mbps 4Mbps 4Mbps 3Mbps 10Mbps 9Mbps 11Mbps 2Mbps 3Mbps 9Mbps 3Mbps 1Mbps 10Mbps 11Mbps 11Mbps 10Mbps 10Mbps 3Mbps 9Mbps 11Mbps 11Mbps 10Mbps 3Mbps 11Mbps 4Mbps 9Mbps

2.4G WiFi Band

5G WiFi Band

OW-200/218 A1 Dual Band AP


Supports:
100 Concurrent Users
Band Steering Technology

Captive Portal Authentication


Captive Portal Authentication conveniently allows wireless clients to access the network through a customized web login portal.



Local Account Login

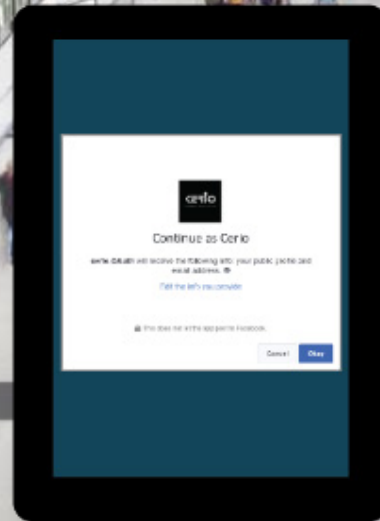

Facebook Login

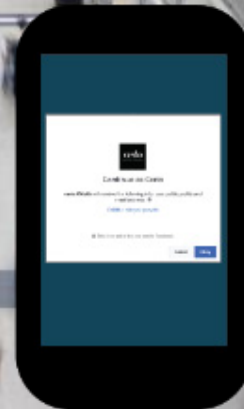


Administrators can deploy a customized Captive Portal with the following login methods

1. Guest Login
2. Local Account Login
3. OAuth2.0 Login

(Facebook/Google/etc.)




Ideal Deployment

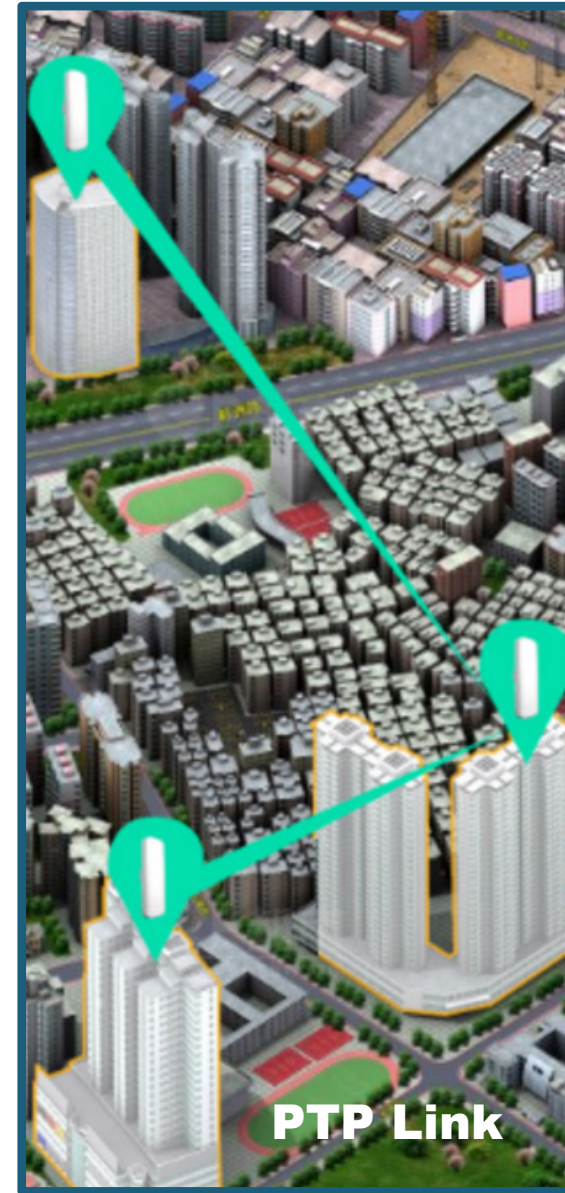

Software Overview



OW-200/218 A1 supports Operation Modes: Control Access Point, Access Point Mode with WDS and Captive Portal Authentication, Client Bridge + Repeater Mode, WISP/CPE Repeater AP Mode.

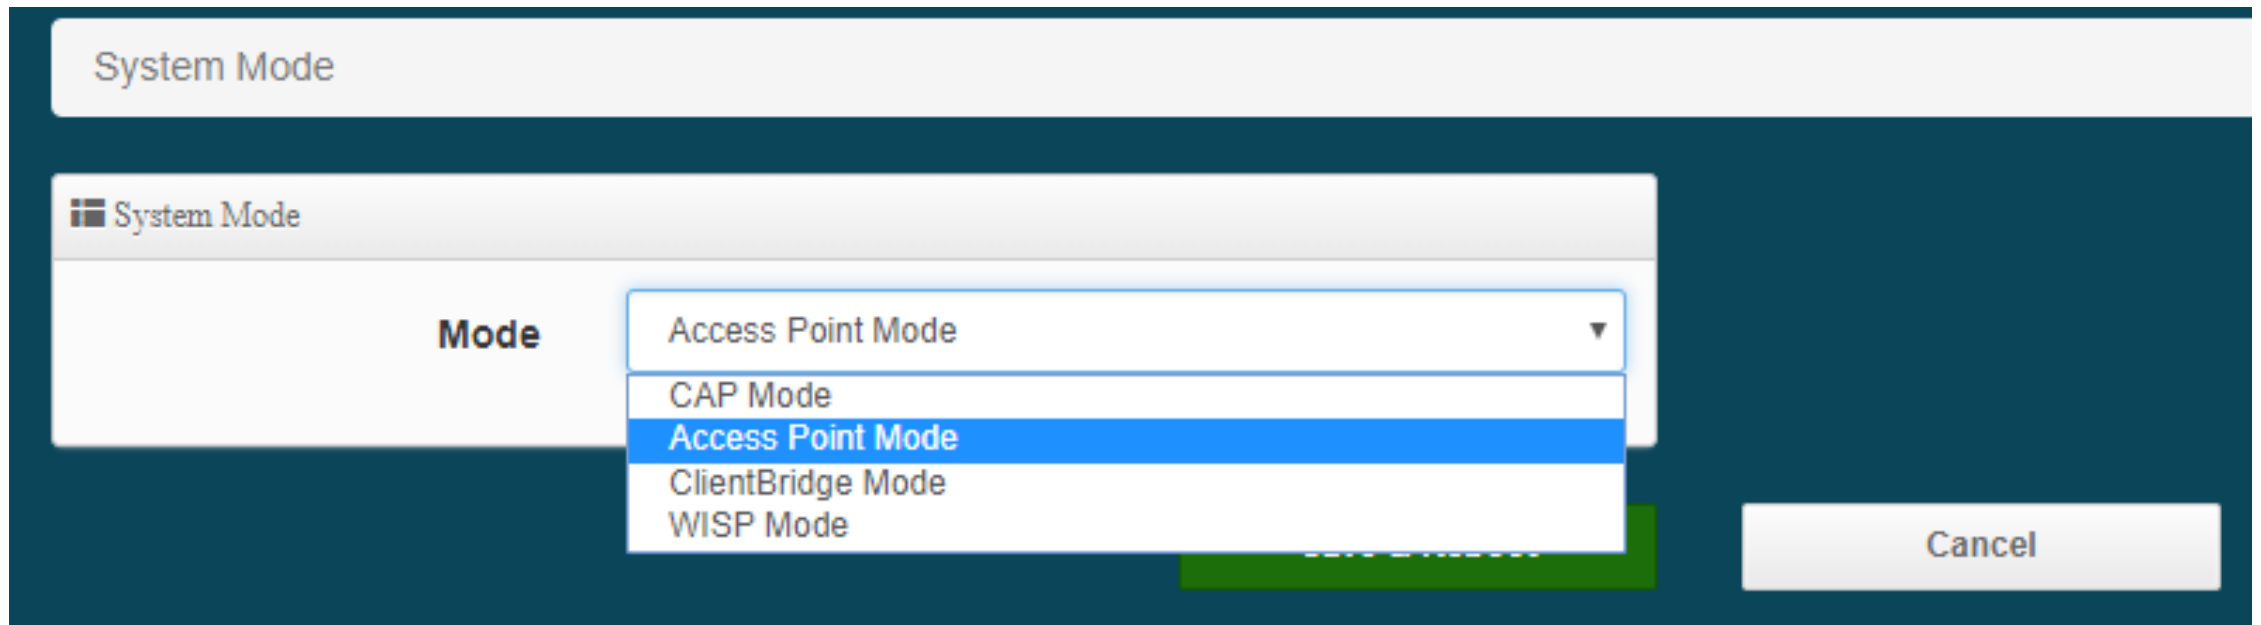

Control Access Point — CERIO

Control Access Point (CAP) Mode's converts the device into a centralized AP management controller. When OW-200/218 A1 is in CAP Mode, it can centrally manage up to 64 AP devices.

The screenshot displays the CERIO web interface for an OW-200 A1 / OW-218 A1 device running CenOS 5.0. The interface is divided into several sections:

- System Overview:** A table of system parameters:

Mode	CAP Mode
System Name	OW-200 A1 / OW-218 A1
System Time	2018/01/01 08:00:43
System Uptime	54
Firmware Version	Pme-CPE-IPQ40XX-CERIO V1.0.0
Firmware Date	2018/05/31 14:50:15
- Information:** Two gauge charts showing system health:
 - CPU Usage:** A gauge showing 0% usage.
 - Memory:** A gauge showing 77% usage.
- Navigation:** A top navigation bar with tabs for System, AP Control, Utility, and Status. The AP Control tab is active, and a dropdown menu is open, listing the following options:
 - Scan Device
 - Batch Setup
 - AP Setup
 - Group Setup
 - Map Setup
 - Authentication Profile
 - Status

Scan AP Device

Filter Device

VLAN#

Default Password

Sort

Update IP Address & Netmask

Control Port

VLAN TAG


IP Address

Netmask

Scan Result

#	Device	IP Address	MAC Address	Password	Host Name	F/W Version	F/W Date	IP Address	Netmask	Action
-	-	-	-	-	-	-	-	-	-	-

CAP Mode allows administrators to scan for AP devices within their virtual LAN and import them into the management database. Once imported, administrators can make quick changes such as changing IP addresses for organization and easy management. Also it supports multi-VLAN centralized management.

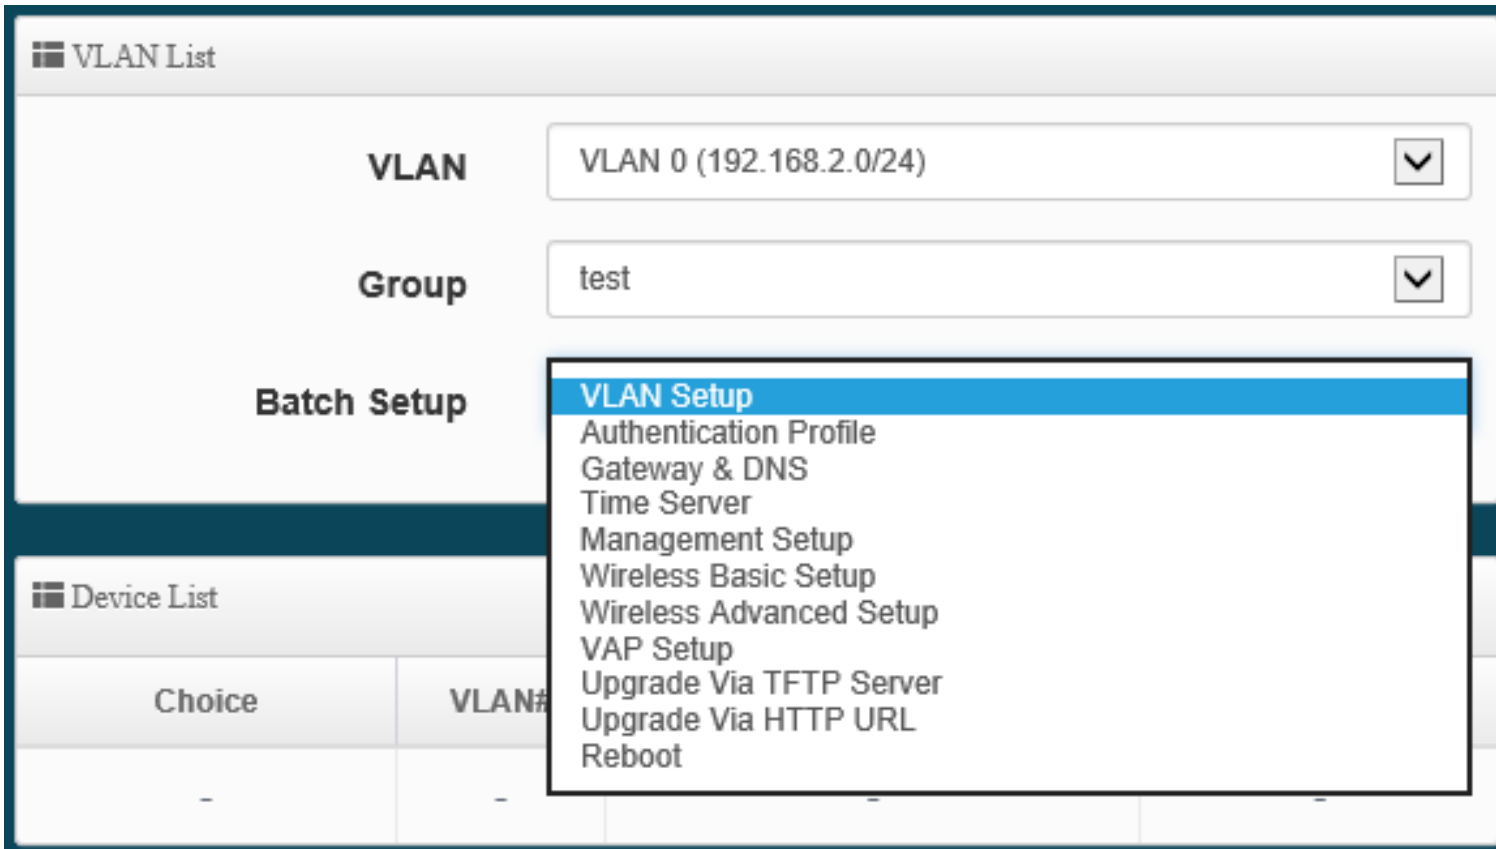

The screenshot shows the CERIO Batch Setup interface. At the top, there is a 'VLAN List' section with two dropdown menus: 'VLAN' set to 'VLAN 0 (192.168.2.0/24)' and 'Group' set to 'test'. Below this is a 'Batch Setup' section with a dropdown menu that is open, showing a list of configuration options: 'VLAN Setup' (highlighted), 'Authentication Profile', 'Gateway & DNS', 'Time Server', 'Management Setup', 'Wireless Basic Setup', 'Wireless Advanced Setup', 'VAP Setup', 'Upgrade Via TFTP Server', 'Upgrade Via HTTP URL', and 'Reboot'. At the bottom, there is a 'Device List' table with columns for 'Choice' and 'VLAN#', both containing dashes.

Choice	VLAN#
-	-

CAP Mode's control function supports centralized configuration of managed APs. This allows administrators to make convenient batch changes to the network of AP devices from one centralized location. This main function of CAP mode can save time and cost by reducing servicing and installation time.

VLAN Setup

Apply

VLAN

VLAN Mode Enable Disable

Access Point 0 Enable Disable

Access Point 1 Enable Disable

802.1d Spanning Tree Enable Disable

Control Port Enable Disable

IAPP

IP Setup

Apply Enable Disable

IP Mode Enable Disable

IP Address

Netmask

ETH0 VLAN Tag Setup

ETH0 Enable Disable

VLAN TAG

Administrators can enable VLAN Mode, Spanning tree, Control Port capabilities, IAPP Roaming, change IP settings and setup VLAN tag (IEEE 802.1Q) for batches of access points. These changes can be implemented differently for each VLAN, allowing for both centralized and organized control.


CAP Mode also supports Map Setup function for organizing your AP network. Administrators can create maps by uploading floor plan URLs and dragging APs to the correct location. Once complete, administrators can monitor AP statuses such as uptime, data rates, and connected clients

Map List				Create New Map
#	Name	Description	Action	
1	1F_plan	Location Map for man...	View	▼



CenOS 5.0 supports Authentication Access Point Mode for versatile AP deployment. Administrators can choose from many authentication options to best suit their network needs.

This enables convenient access to the wireless network for public clients, as well as improved management and organization for network administrators

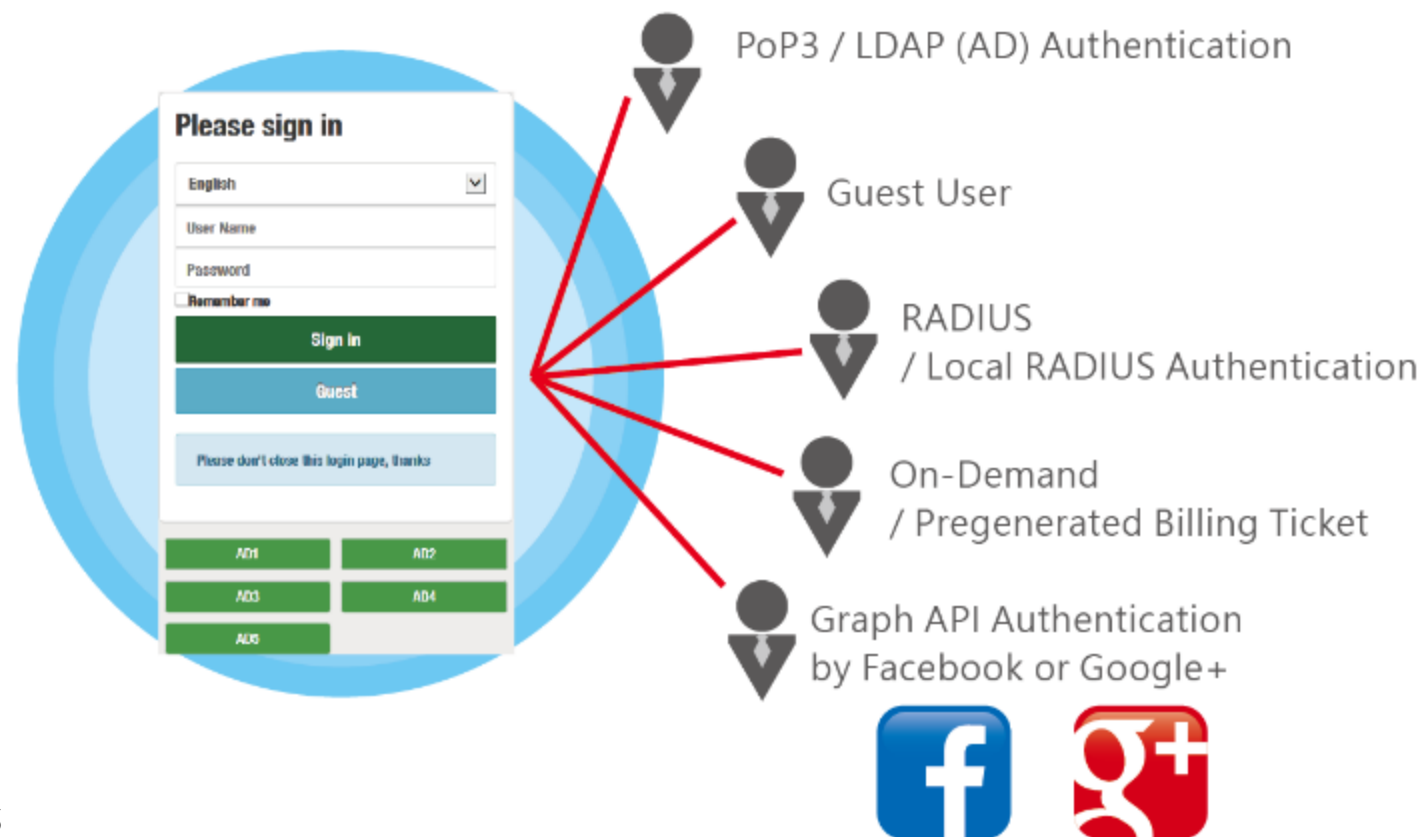

CenOS 5.0 supports multiple methods of authentication for user management, security and convenience.

OAuth2.0 : Allows devices to use third-party credentials such as Facebook and Google+ for user authentication. This provides login convenience for public clients and also allows administrators to collect data through Facebook / Google analytics.

OAuth 2.0 Provider List Create New Provider			
#	Active	Provider	Action
1	On	Google	Edit ▾
2	On	Facebook	Edit ▾



Guest Login : Provides limited WiFi connection to clients to an open network. Limitations can be put in place to manage client limits, connection time, and control bandwidth

The screenshot shows the 'Guest' configuration interface. It includes the following settings:

- Service**: Enable, Disable
- Login Type**: One Time, Multiple Time
- Count Limit**:
- Login Time**: Minutes
- QoS**: Enable, Disable
- Upload**: Kbps
- Download**: Kbps

Local User: Provides fixed authentication user accounts for controlled client login and data management. Administrators can track Local Account usage, connection time, etc. CenOS 5.0 supports up to 10 Local User accounts

The screenshot shows the 'Local User List' interface with the following table:

#	Name	Action
1	Test Account 1	Delete
2	Test Account 2	Delete

Administrators can create a customized Login Page which can become a platform for:

(1.) Promotions **(2.)** Brand Exposure **(3.)** Advertisements **(4.)** Platform for providing Information

This customized Captive Portal supports login through **1.** Guest Users **2.** Local Accounts
3. Facebook, Google+, etc using OAuth2.0.

Preview

Please sign in

User Name

Password

Remember me

Sign in

Guest

AD1 AD2

AD3 AD4

AD5

Default Template

Page Setup

Template Enable Disable

Multiple Language Enable Disable

Customize HTML Source code

```
<-html>
<-head>
  <title> | hotspot | </title>
  <script src="/javascript/login.js" charset="utf-8" type="text/javascript"></script>
<-head>
<-body>
  <div class="container"> </div>
<-body>
<-html>
```

Preview

Customize through HTML Code

Bandwidth Control of connected clients allows administrators to control individual user upload and download speeds, as well as set a maximum limit on the total amount of bandwidth that can be used at a single time.

VLAN Setup / VLAN 0 ▾ / Bandwidth Control

Bandwidth Control

Mode Enable Disable

Airtime Fairness Enable Disable

Total Bandwidth Control

Mode Enable Disable

Upload Kbps

Download Kbps

QoS RuleList

#	Active	Rule Mode	Value1	Value2	Upload(Kbps)	Download(Kbps)	Comment
1	<input type="checkbox"/>	ANY ▾	<input type="text"/>	<input type="text"/>	<input type="text" value="1024"/>	<input type="text" value="1024"/>	<input type="text"/>

Modes Walled Garden function allows administrators to create a browsing environment that controls user access and accessible information. This function is ideal for directing users to specific parts of the Web such as;

1. Paid Content
2. Self-Promotions
3. Free access to specific websites
4. Advertisement web pages

Walled Garden

Display Name (4 -32 chars)

IP Address/Domain

Full URL

Enabled Walled Garden Websites



Built-in 802.1x RADIUS

Supports integrated 802.1x RADIUS Server authentication for small to medium network environments. This supports a maximum of 50 built-in RADIUS Users.

#	Name	Action	#	Name	Action
-	-	-	-	-	-

Increased Security- Individual user sessions are encrypted uniquely, which prevents other users from acquiring private information

Cost Efficient – The built-in RADIUS server design removes the need to purchase additional equipment such as external servers.

OW-200/218 A1's Dual Band radio design supports a total of 16 Virtual LANs (VLAN) and 16 SSIDs. Each VLAN supports one SSID on the 5GHz frequency band.

VLAN Setup						
VLAN List						
#	VLAN Mode	Flag	IP Address	Netmask	Radio 0	Action
0	On	Native ETH0 Access Control	192.168.2.254	255.255.255.0	5G_0	Network
1	Off	ETH0.101	-	-	5G_1	Network



Supports 16 VLANS (#0 to 15)



Each VLAN supports 1 SSID for 5G frequency band

ETH0 VLAN Tag Setup

VLAN TAG 1-4096

Support up to **4096** Tags. This is a crucial feature that ensures successful directing of packet traffic for VLANs that span across multiple switches.

WDS Setup

WDS Setup Enable Disable

Security Type

PassPhrase

WDS Client Setup

Radio 0

Enable	MAC Address
<input type="checkbox"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>
<input type="checkbox"/>	<input type="text"/>

OW-200/218 A1 with **CenOS 5.0** supports **WDS Setup** when operating in **Access Point Mode**

OW-200/218 A1's Access Point mode

supports **8** WDS links per radio for a total of **8 links** per device

(8x WDS on the 5GHz frequency band)

Supports multi-tags on same WDS channel

VLAN Setup

VLAN#	Radio 0		
	Native	TAG	TAG ID
VLAN 0	<input checked="" type="radio"/>	<input type="checkbox"/>	<input type="text"/>
VLAN 1	<input type="radio"/>	<input type="checkbox"/>	<input type="text" value="101"/>


802.11r/802.11k Fast Roaming

Fast Roaming Enable Disable

Fast Roaming Settings

Mobility Domain	<input type="text" value="a1b2"/>
R0 Key Lifetime	<input type="text" value="10000"/>
Reassoc deadline	<input type="text" value="1000"/>
R0/NAS Identifier	<input type="text" value="ap.example.com"/>
R1 Identifier	<input type="text" value="000102030405"/>
R1 Push	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

802.11k- Smartly provides roaming client with information regarding nearby APs and their channels, which prepares the client for easier roaming.

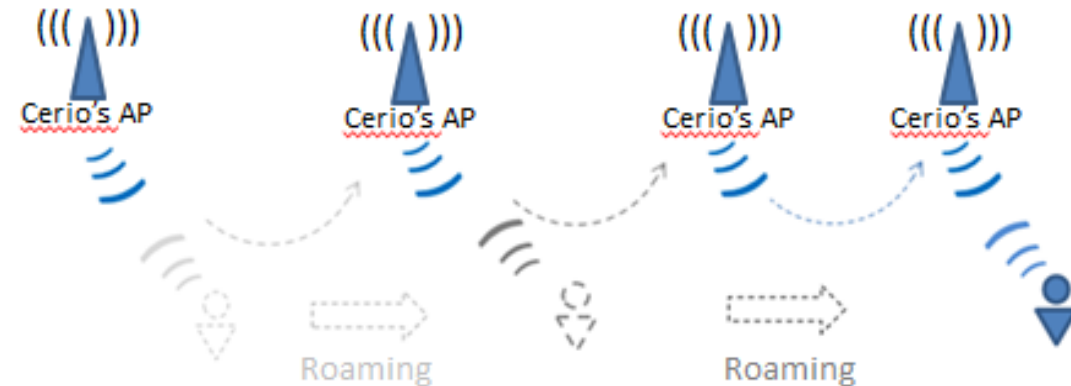

802.11r- Stores encryption keys on all the APs within the network. This simplifies the authentication process when clients roam to new APs, greatly reducing CPU loading and latency.

LED Control

LED OFF Enable Disable

LED Control- User can select LED disable or enable by their preferences or environmental needs

Auto Reboot

Type:

- Disable
- Daily
- Week
- Month

Auto Reboot- Setup device auto reboot schedule to reduce CPU overloading and device crashes.

Type:

Hour:

Minute:

By Day

Type:

Weekly: Sun Mon Tue Wed Thu Fri Sat

Hour:

Minute:

By Weekly

Type:

Monthly

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
01	02	03	04	05	06	07	08	09	10
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	12	13	14	15	16	17	18	19	20
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21	22	23	24	25	26	27	28	29	30
<input type="checkbox"/>									
31									

Hour:

Minute:

By Monthly

What we do



Innovation & Design

Our R&D team continues to incorporate the newest wireless protocols and features to make our products perfect for enterprise deployment.



Wireless Solutions

Our Field Application Engineers and Specialists have unparalleled experience providing the perfect solution for any wireless projects (e.g. Hotels, Long Distance PTP Backhaul, Universities)



Software Development & Design

Our software provides a high featured and easily operated User Interface and also supports centralized AP Management for convenient device deployment.



Outstanding Customer Service

CERIO's customer service staff are experts on our products and possess clear and patient communication skills.

Contact Information

CERIO

CERIO Corporation

4F.-3., No.192, Sec. 2, Zhongxing Rd., Xindian Dist.,
New Taipei City 231, Taiwan (R.O.C.)

Telephone : +(886) 02-8911-6160

Fax : +(886) 02-8911-6180



www.cerio.com.tw



issales@cerio.com.tw



www.facebook.com/center.ww



www.linkedin.com/company/cerio-corporation



www.youtube.com/channel/UCejUL-o3rQavyItXEEMyK1A

CERIO

Amplify your Wireless Network