

OW-200 A1

**eXtreme Power Wave2 4x 11ac 5Ghz 2x2
Outdoor Bridge (300mW)**

EAN Code : 4712757159547



Introduction

CERIO's OW-200 A1 eXtreme Power 5GHz 2x2 Outdoor Bridge (300mW) is a outdoor AP that combined superior functionality with an elegant and highly durable housing design. This 11ac outdoor access point with latest 11ac technology for improvements in the speed, reliability and quality of wireless communications, provides wireless 4 channel (4x speed) simultaneous operation in 5GHz wireless coverage for maximum flexibility. It supports a maximum throughput up to **867Mbps** on the 5GHz frequency band.

OW-200 A1 utilizes an 300mW high power design with **two external N-Type antenna connectors** are assigned to the 5GHz band. This device is powered through 802.3at Power over Ethernet, allowing both power and data to be provided through CAT5 cabling. OW-200 A1's also supports fast wireless roaming 802.11r/k protocol for seamless roaming and smart client handoff.

OW-200 A1's high performance and **IP68 weather-proof** durable design makes it perfect for deployment in enterprise, government, public environments, and WISP application.

Highlight Features

- 5GHz band supports wireless standard 802.11an/ac protocol with a maximum data transfer rate of 867Mbps.
- 300mW at 5Ghz Output eXtreme High Power design.
- 2 external 5Ghz 2x2 N-Type Connectors.
- Supports CenOS 5.0 Software.
- Operation Modes : Access Point Mode (includes Hotspot Portal Authentication, Pure AP Mode, and AP + WDS Mode), Control Access Point Mode (Centralized AP Management), Client Bridge + Repeater Mode, and WISP / CPE Repeater Mode.
- IEEE 802.3at Power over Ethernet supported.
- Built in 802.1x RADIUS authentication server and supports up to 50 User Accounts.
- Provide customizable login and logout Captive portal page by Web Page.
- Weather-proof Housing (IP68 Approved).
- Built-in OAuth2.0 Facebook / Google account and support advanced features to create OAuth2.0 new service provider.
- CenOS 5.0 Control Access Point Mode (CAP), supports centralized management of up to 64 AP devices.
- With AP mode supports at total of 16 Multiple-ESSIDs per device.
- With AP mode supports 8 WDS Links per device.



Software Features

- Supports built-in 802.1x RADIUS authentication server account database for small and medium environments, removing the need to set up external server and avoiding additional costs. Also supports RADIUS Server authentication server account features to fit the needs of large-scale network environments.
- Built-in Time Policy function can set multiple times schedule apply to RF on/off and IP/MAC filter or other security function.
- Captive Portal Authentication supports by remote RADIUS server, Local account, third-party OAuth2.0, LDAP (AD), POP3, Guest and remote bulk MAC Address.
- Wireless AP group management - Automatic configuration and setting of intelligent control of AP.
- Each SSID supports 802.1q VLAN Tag standards, supporting up to 4096 group VLAN Tag capability With AP mode supports WPA-PSK/TKIP,WPA-802.1x/TKIP, 802.11i WPA2-PSK/CCMP/AES,WPA2 (802.1x /CCMP / AES), No. of registered RADIUS servers: 1.
- QoS(Quality of Service) for bandwidth management and traffic prioritization and supports network.
- Users Upload/Download Bandwidth Control speed limits, and User Device (Total) bandwidth control. Administrators can regulate the 3limit of each network user.
- Supports IEEE802.11f IAPP and IEEE802.11r and IEEE802.11k Fast Roaming.
- Support Ping Watchdog function, which automatically monitoring device operations and reboots the device before a crash can occur.
- Supports Location Tracking function, which can provide the wireless user's distance location information to the database for analysis.
- Software Web UI supports auto reboot setting function. Software setting allows automatically reboot by Daily/Weekly/Monthly settings.
- Supports intelligent auto channel scanning function, automatic scanning the most undisturbed and suitable wireless channel in the field environment, which is convenient and time-saving.
- Administrative Access : Supports Telnet and SSH.
- Provides Traffic Monitor and Graphical GUI Status Interface for Network and Radio Overview.

Hardware Features

- Supports 5Ghz band and the maximum transmission rates is 867Mbps.
- 300mW at 5Ghz Output eXtreme High Power design.
- Supports 2 10/100/1000Mbps Gigabit Ethernet Port and ETH1 port supports PoE function.
- IEEE 802.3at Power over Ethernet supported.
- Support 2 external N-Type connectors are assigned to the 5GHz band.
- With IP68 weather-proof durable design are made to withstand harsh environment deployment.
- Integrates a long-range power amplifier and high sensitivity receiver to deliver unmatched reliability and performance at large coverage application.
- ESD protection (Electro Static Discharge): Conductive: 4KV ; Air: 8KV.
- Complying with Open Circuit Voltage and Short Circuit Current hardware standard design.
- Pressure vent (prevents internal condensation).

Hardware Overview

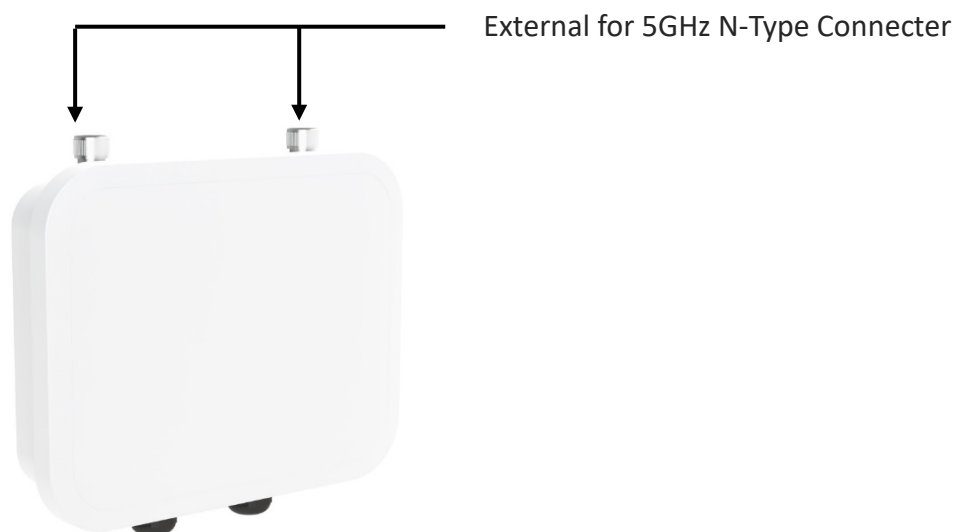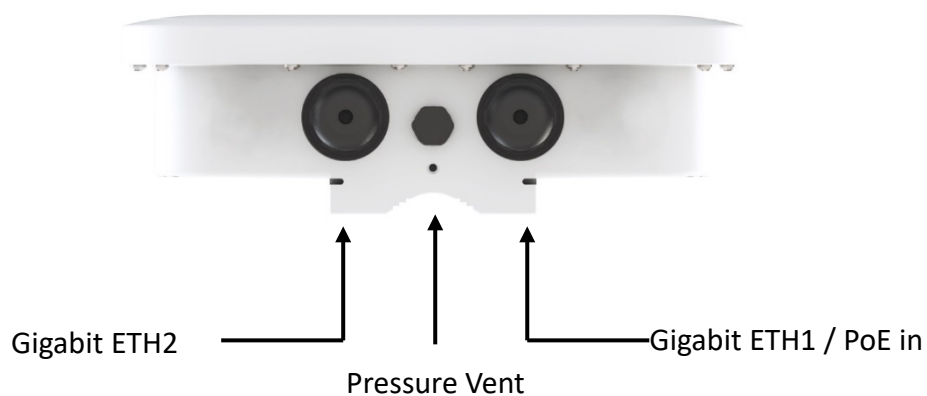

Mounting Application

Pole Mounting



Wall Mounting



Adjustable Wall Mounting (Optional adjustable mounting bracket set OW-PKUR)



Adjustable Pole Mounting (Optional adjustable mounting bracket set OW-PKUR)



Software

Application Software

Cerio CenOS 5.0 Software Core

Standards & Hardware Specifications

Network Standards Conformance

IEEE 802.11 a/n/ac compliant
 IEEE 802.3 / IEEE 802.3u
 IEEE 802.3at Power Over Ethernet compliant
 IEEE 802.11Q VLAN
 IEEE 802.11r/IEEE802.11k Fast Roaming
 IEEE 802.11e WMM
 IEEE 802.1x RADIUS

Ethernet Configuration

10/100/1000BASE-TX Auto MDI/MDI-X Ethernet Connector x 2
 (Power over Ethernet 802.3.at PoE in)

LED Indicators

PWR (Power)	x1
ETH1 (PoE In)	x1
ETH2	x1
5G Signal LED	x1

Wireless Specifications

Data Transfer Rate

IEEE802.11n :

400Mbps (@ 40MHz 256QAM)

IEEE802.11ac :

867Mbps(@ 80MHz 256QAM)

Frequency Range

IEEE802.11a/an/11ac :

Supports 5.180 – 5.240 & 5.725 – 5.825 GHz

Channel Spacing

IEEE802.11an : 20/40MHz

IEEE802.11ac: 80MHz

Media Access Protocol

CSMA / CA with ACK

Modulation Method

IEEE802.11a :

OFDM(64-QAM,16-QAM,QPSK,BPSK)

IEEE802.11n :

OFDM (256-QAM, 64,-QAM, 16-QAM, QPSK,BPSK)

IEEE802.11ac :

OFDM (256-QAM, 64,-QAM, 16-QAM, QPSK,BPSK)

Operating Channels

5GHz : 36-64, 100-140, 149-165
 (Depends on configured regulatory domain)

Transmit Power Variation

5GHz : Max : 24 ± 1 dBm

Receiver Sensitivity

5GHz : Max : -92 dBm

Environmental & Mechanical Characteristics

Operating Temperature

-20 °C ~ 65 °C

Storage Temperature

-30 °C ~ 80°C

Operating Humidity

10% - 95% Non-Condensing

Storage Humidity

10% - 95% Non-Condensing

Antenna

2 N-Type Connectors for 5GHz external antennas

Form Factor

Supports both Pole / Wall Mounting installed using a provided Mounting Bracket. With IP68 Rating

ESD

Conductive: 4KV ;

Air: 8KV

Surge Protection

L to L: 1KV

L to G: 4KV (EN61000-4-5)

Vent

Automatically Adjustable Vent Design

System Power Consumption

14Watt (Max)

Power Supply

Supports Power Over Ethernet (POE 48~57V voltage)

Input Power

IEEE802.3at 48V~57V PoE In

Dimensions (W x D x H)

252 x 200 x 78 mm

Unit Weight

1.33kg

Production Location

TW

Certifications

CE, FCC, NCC, ROHS Compliant

Package Contents

Package Contents	
OW-200 A1 Main Unit	x1
PoE Power supply Kit	x1
Wall/Pole Mounting Bracket Set	x1
Quick Installation Guide(Chinese/English)	x2
Warranty Card	x1