

OW-408 A1

eXtreme Power Wave2 4x 11N/ac 2.4/5Ghz 2x2 Outdoor Access Point (300mW)

EAN Code : 4712757159530



Introduction

CERIO's OW-408 A1 eXtreme Power Wave2 4x 11N/ac 2.4/5Ghz 2x2 Outdoor Access Point is a dual band outdoor AP that combined superior functionality with an elegant and highly durable housing design. This 11ac outdoor concurrent dual band access point with latest MU-MIMO technology for improvements in the speed, reliability and quality of wireless communications, provides wireless 4 channel (4x speed) simultaneous operation in both 2.4GHz and 5GHz wireless coverage for maximum flexibility. It supports a maximum throughput of **1300Mbps**, up to **400Mbps** on the 2.4GHz frequency band and **867Mbps** on the 5GHz frequency band.

OW-408 A1 utilizes an 300mW high power design with a **built-in 8dBi dual band Wide Coverage Directional Antenna**. This device is powered through 802.3at Power over Ethernet, allowing both power and data to be provided through CAT5 cabling. OW-408 A1's also supports fast wireless roaming 802.11r/k protocol for seamless roaming and smart client handoff.

OW-408 A1's high performance and **IP68 weather-proof** durable design makes it perfect for deployment in enterprise, government, public environments, and WISP application.

Highlight Features

- 2.4GHz band supports wireless standard 802.11bgn protocol with maximum data transfer rate of 400Mbps.
- 5GHz band supports wireless standard 802.11an/ac protocol with a maximum data transfer rate of 867Mbps.
- 300mW at 2.4GHz and 5GHz Output eXtreme High Power design.
- Built in 8dBi dual band Wide Coverage Directional Antenna.
- Supports CenOS 5.0 Software.
- Operation Modes : Access Point Mode (includes Hotspot Portal Authentication, Pure AP Mode, and AP + WDS Mode), Control Access Point Mode (Centralized AP Management), Client Bridge + Repeater Mode, and WISP / CPE Repeater Mode.
- IEEE 802.3at Power over Ethernet supported.
- Built in 802.1x RADIUS authentication server and supports up to 50 User Accounts.
- Provide customizable login and logout Captive portal page by Web Page.
- Weather-proof Housing (IP68 Approved).
- Built-in OAuth2.0 Facebook / Google account and support advanced features to create OAuth2.0 new service provider.
- CenOS 5.0 Control Access Point Mode (CAP) supports centralized management of up to 64 AP devices.
- With AP mode supports at total of 32 Multiple-ESSIDs per device (16 ESSID on 2.4Ghz and 16 ESSID on 5Ghz).
- With AP mode supports x8 WDS per Radio (2.4Ghz band WDS x8 and 5Ghz band WDSx8) for a total of 16 WDS Links.



Software Features

- Supports built-in 802.1x RADIUS authentication server account database for small and medium environments, removing the need to set up external server and avoiding additional costs. Also supports RADIUS Server authentication server account features to fit the needs of large-scale network environments.
- CAP Mode Group management –maintain a set of setting templates that simplify the task of assigning the same setting to multiple APs.
- Wireless AP group management - Automatic configuration and setting of intelligent control of AP.
- Each SSID supports 802.1q VLAN Tag standards, supporting up to 4096 group VLAN Tag capability.
- With AP mode supports WPA-PSK/TKIP,WPA-802.1x/TKIP, 802.11i WPA2-PSK/CCMP/AES,WPA2 (802.1x /CCMP / AES), No. of registered RADIUS servers: 1.
- QoS(Quality of Service) for bandwidth management and traffic prioritization and supports network.
- Users Upload/Download Bandwidth Control speed limits, and User Device (Total) bandwidth control. Administrators can regulate the limit of each network user.
- Supports IEEE802.11f IAPP and IEEE802.11r and IEEE802.11k Fast Roaming.
- Support Band steering technology to automatically switch between frequency bands. When using dual-band network cards with 802.11ac, users can always automatically connect to 5Ghz Radio.
- Support Ping Watchdog function, which automatically monitoring device operations and reboots the device before a crash can occur.
- Supports Location Tracking function, which can provide the wireless user's distance location information to the database for analysis.
- Software Web UI supports auto reboot setting function. Software setting allows automatically reboot by Daily/Weekly/Monthly settings.
- Supports intelligent auto channel scanning function, automatic scanning the most undisturbed and suitable wireless channel in the field environment, which is convenient and time-saving.
- Supports CenOS 5.0 built-in Control Access Point Mode (Controller-less Wireless LAN), in addition to future CenOS 5.0 compatible management platforms.
- Administrative Access : Supports Telnet and SSH.
- Provides Traffic Monitor and Graphical GUI Status Interface for Network and Radio Overview.

Hardware Features

- Supports 2.4GHz/5GHz dual-band and the maximum transmission rates are 400/867Mbps respectively while operating up to 1300Mbps.
- Supports 300mW at 2.4GHz/5GHz Output eXtreme High Power design.
- Supports 2 10/100/1000Mbps Gigabit Ethernet Port and ETH1 port supports PoE function.
- IEEE 802.3at Power over Ethernet supported.
- Built in 8dBi dual band Wide Coverage Directional Antenna (2.4GHz H : 55 , E : 60 ; 5GHz H : 100 , E : 80).
- With IP68 weather-proof durable design are made to withstand harsh environment deployment.
- Integrates a long-range power amplifier and high sensitivity receiver to deliver unmatched reliability and performance at large coverage application.
- ESD protection (Electro Static Discharge): Conductive: 4KV ; Air: 8KV.
- Complying with Open Circuit Voltage and Short Circuit Current hardware standard design.
- Pressure vent (prevents internal condensation).

Hardware Overview

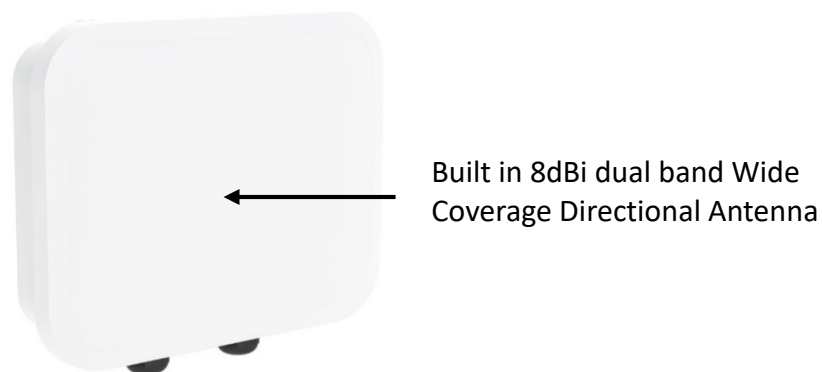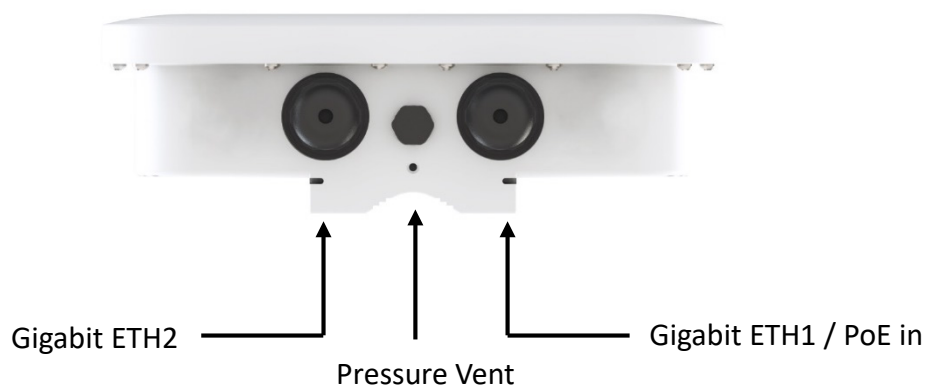

Mounting Application

Pole Mounting



Wall Mounting



Adjustable Wall Mounting (Optional adjustable mounting bracket set OW-PKUR)



Adjustable Pole Mounting (Optional adjustable mounting bracket set OW-PKUR)



Software

Application Software

Cerio CenOS 5.0 Software Core

Standards & Hardware Specifications

Network Standards Conformance

IEEE 802.11b/g/n/a/ac compliant
 IEEE 802.3/IEEE 802.3u
 IEEE 802.3at Power Over Ethernet compliant
 IEEE 802.11Q VLAN
 IEEE 802.11r/IEEE802.11k Fast Roaming
 IEEE 802.11e WMM
 IEEE 802.1x RADIUS

Ethernet Configuration

RJ45 10/100/1000M Ethernet Connector x2 Ports
 (ETH1: Power over Ethernet 802.3at PoE in)

LED Indicators

PWR (Power)	x1
ETH1 (PoE In)	x1
ETH2	x1
2.4G Signal	x1
5G Signal	x1

Wireless Specifications

Data Transfer Rate

IEEE802.11b : 1 / 2 / 5.5 / 11Mbps (auto sensing)
IEEE801.11g : 6/ 9/ 12/ 18/ 24/ 36/ 48/ 54Mbps
IEEE802.11n : 400Mbps (@ 40MHz 256QAM)
IEEE802.11ac : 867Mbps(@ 80MHz 256QAM)

Frequency Range

IEEE802.11nbg :
 Supports 2.412 ~ 2.472 GHz
IEEE802.11a/an/11ac :
 Supports 5.180 – 5.240 & 5.725 – 5.825 GHz

Channel Spacing

IEEE802.11b/g/n : 20/40MHz
IEEE802.11ac: 20/40/80MHz

Media Access Protocol

CSMA / CA with ACK

Modulation Method

IEEE802.11b : DSSS (DBPK,DQPSK,CCK)
IEEE802.11a/g : OFDM(64-QAM,16-QAM,QPSK,BPSK)
IEEE802.11n/ac : OFDM (256-QAM, 64,-QAM, 16-QAM, QPSK,BPSK)

Operating Channels

2.4GHz : 1-13
5GHz : 36-64, 100-140, 149-165
 (Depends on configured regulatory domain)

Transmit Power Variation

2.4GHz : Max : 24 ± 1 dBm
5GHz : Max : 24 ± 1 dBm

Receiver Sensitivity

2.4GHz : Max : -96 dBm
5GHz : Max : -92 dBm

Environmental & Mechanical Characteristics

Operating Temperature

-20 °C ~ 65 °C

Storage Temperature

-30 °C ~ 80°C

Operating Humidity

10% - 95% Non-Condensing

Storage Humidity

10% - 95% Non-Condensing

Antenna

Built in 8dBi dual band Wide Coverage Directional Antenna (2.4GHz H : 55 , E : 60 ; 5GHz H : 100 , E : 80)

Vent

Automatically adjustable Vent design

Form Factor

Supports both Pole / Wall Mounting installed using a provided Mounting Bracket. With IP68 Rating

ESD

Conductive: 4KV
 Air: 8KV

Surge Protection

L to L: 1KV
 L to G: 4KV (EN61000-4-5)

System Power Consumption

14Watt (Max)

Power Supply

Supports Power Over Ethernet (POE 48~57V)

Input Power

IEEE802.3at PoE In

Dimensions (W x D x H)

252 x 200 x 78 mm

Unit Weight

1.22kg

Production Location

TW

Certifications

CE, FCC, NCC, ROHS Compliant

Package Contents

Package Contents	
OW-408 A1 Main Unit	x1
PoE Power supply Kit	x1
Wall/Pole Mounting Bracket Set	x1
Quick Installation Guide(Chinese/English)	x2
Warranty Card	x1