


CS-1224G

24 Port 10/100/1000M Gigabit Switch with 2 SFP Ports

EAN Code : 4712757151923



Introduction

CERIO CS-1224G is a 10/100/1000Mbps 24 port Gigabit Ethernet Switch that utilize 2 Gigabit SFP uplink ports. The CERIO CS-1224G case is designed for small offices, and can be optionally upgrade to 1U" chassis.

The CS-1224G is ideal for micro-segmenting large networks into smaller networks, connecting subnets for improved performance, and enabling the bandwidth demanded for multimedia and imaging applications. Moreover, the 10/100/1000Mbps Auto-Sensing ability provides an easy way to migrate Gigabit network without pain. By integrating both data transmitting cable and power cord, the hassle of constructing your network can be eliminated, allowing you to easily connect your wired LAN network. This switch defines new green power saving idea in all Ports. Using the 802.3az Energy Efficient Ethernet standard, the network will automatically decrease the power usage when traffic is low with no setup required. It can solve the limitation of the network local LAN and offer the system relocation easily Plug & play and all kinds of network protocols compilation make the installation of the device both simple and quick. With auto-MDI/MDI-X support, there is no need for any Crossover cables when you connect the device to a computer, or even another switch. In addition, the auto-negotiation function auto-senses and adjusts the connected devices whether they are running at 10Mbps, 100Mbps, or 1000Mbps.


The CS-1224G also supports Low Power Idle Mode. When Low Power Idle Mode is enabled, systems on both sides of the link can disable portions of functionality and save power during periods of low link utilization, **reducing power consumption up to 81%**. With its non-blocking architecture, the Green Ethernet switch receives and forwards the traffic seamlessly. Duplex mode also doubles the bandwidth by enabling two-way communication. **Totaling up to 52Gbps of switching capacity to a shared total 10/100/1000 Mbps network.**

Highlight Features

- Complying with IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3az specifications.
- 24 Port 10/100/1000Mbps TX Auto-Negotiation Ethernet Switch.
- Supports 2 Gigabit SFP Fiber uplink ports for IEEE 802.3z 1000Base-SX/LX.
- Supports Energy-Efficient Ethernet (EEE), IEEE 802.3az standard.
- Supports Green Ethernet features, Link-On and Cable Length Power Saving, Link-Down Power Saving, Power saving mode support to automatic cable detection.
- Supports auto-detection for SFP ports / mini-GBIC module insertion.

- Half/Full-duplex capability on each TX port Auto-learning networking configurations.
- Supports Store & Forward architecture and performs forwarding and filtering.
- IEEE802.3x flow control for Full-duplex, Back Pressure function for Half-duplex operation.
- Provides 9K Jumbo frames to improve network utilization of a large file transfers.
- Non-blocking & Non-head-of-line blocking full-wire speed forwarding.
- Supports TP interface Auto MDIX function for auto TX/RX swap.
- Automatic Source MAC Address Learning and Aging.
- Supports up to 8K MAC addresses and Up to 4 .1Mb buffer memory.

Hardware Overview

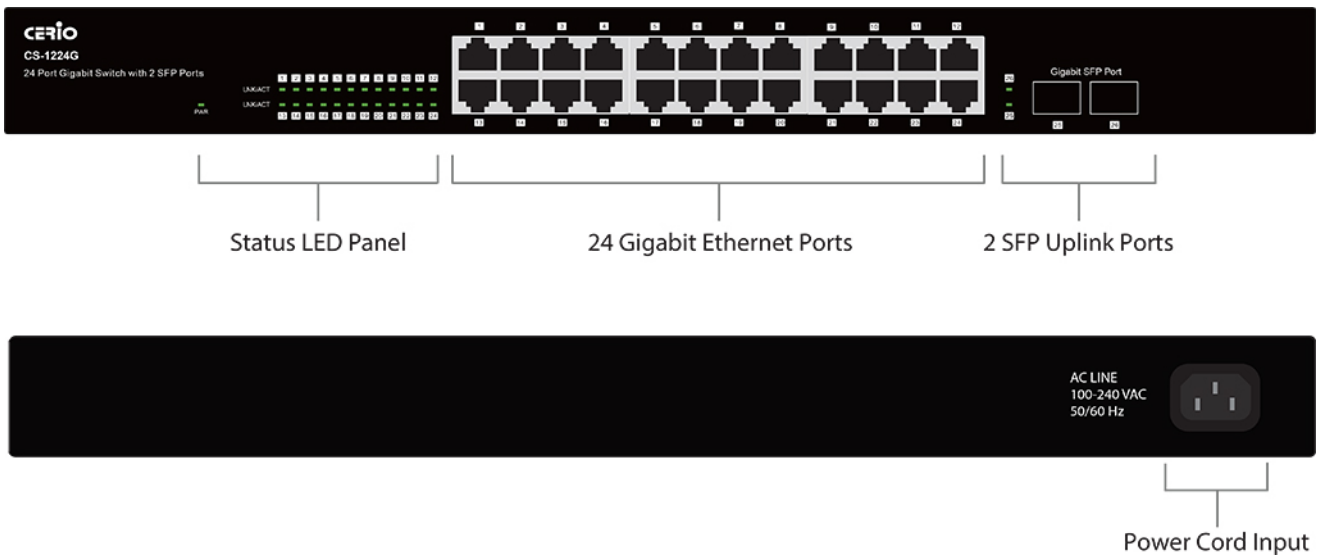

Standards & Hardware Specifications

Network Standards Conformance

IEEE 802.3 10Base-T
 IEEE 802.3u 100Base-TX,
 IEEE 802.3ab 1000Base-T,
 IEEE 802.3z 1000Base-SX/LX
 IEEE 802.3x Flow Control
 IEEE 802.3az EEE

Port Configuration

24 ports RJ-45 connectors for 10/100/1000 BASE-TX
 2 ports Gigabit SFP Fiber uplink

Media Access Protocol

CSMA / CD

Network Media

10BASE-T: UTP Cat. 3 or up,
 100BASE-TX: UTP Cat. 5 or up,
 1000BASE-T: UTP Cat. 5 or up

Transmission Method

Store and Forward

MAC Address Table

8K

Built-in Buffer

4.1Mb

Jumbo Frame

9K

Data Transfer Rate

10/100/1000Mbps (Half-duplex),
 20/200/2000Mbps (Full-duplex)

Auto MDI/MDIX

Yes

LED Indicators

Per Port: Link Status x24
 Per Port: Activity Status x24
 SFP Port: Connection Status x2
 Per Unit: (PWR) x2

Internal Bus Speed

52Gbps

Environmental & Mechanical Characteristics

Power Consumption

4.7 Watts

Power Type

Power cord: Internal Power supply

Power Requirement

AC 100~240VAC, 50-60Hz Auto-sensing

Operating Temperature

0° to 50° C

Storage Temperature

-40° to 70° C

Operating Humidity

5% to 90% non-condensing

Storage Humidity

5% to 90% non-condensing

Dimensions (W x H x D)

441 x 131 x 44 mm (19 inch)

Unit Weight

1.92kg

Production Location

TW or CN

Certifications

FCC, CE, RoHS-Compliant

Package Contents

Contents

CS-1224G Main Unit	x1
Quick Installation Guide Booklet	x1
Power Cord	x1
19" Rack Mount Brackets	x1
Warranty Card	x1